

Box Contents

Premier Power Supply Section

1x



Power Supply

1x



Premier Middle Section

1x



Data Cables

2x extra



Premier Logo Section

1x



Screws

12x



Req. Equipment

Philips Head
Screw Driver



Before Starting

The Premier is 8.5 ft by 6 inches. Clear a space on the floor, work bench, or counter that can fit the entire product.

INSTRUCTIONS


Setup

Remove the shipping screws on the Power Supply and Logo Sections (red areas below) - last panel will be loose.



Connect the Chassis

Snap Power Supply + Logo Sections into the Middle Section

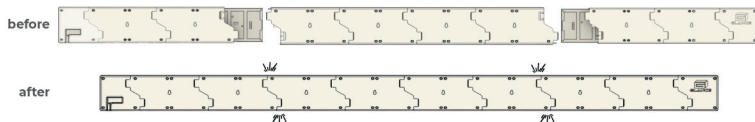

Cable Assembly


Logo Section

Step 1 Plug 2x8 grey cable from Middle Section into LED panel

Step 2 Connect white female power cable from Middle Section into LED panel

Step 3 Secure excess wires into the chassis wire clips

Step 4 Lay LED panel flat into chassis

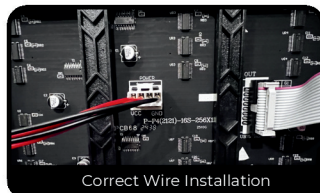


Cable Assembly Cont.

Power Supply Section

Step 1 Plug 2x8 grey cable from Middle Section into LED panel

Step 2 Connect white female power cable from Middle Section into LED panel

Step 3 Connect white male power connector from Middle Section into female power connector from Power Supply Section

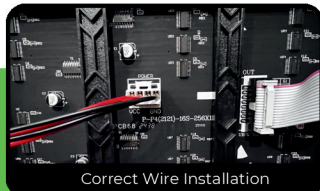

Step 4 Secure excess wires into the chassis wire clips

Step 5 Lay LED panel flat into chassis

Final Assembly

Step 1 Rotate the full panel so the chassis faces up (LEDs down)

Step 2 Fasten screws into the back of the LED panel

Final Check

Ensure all key holes face the right direction



HELPFUL TIPS

Alignment

Tip 1 Align panels from center outward.

Tip 2 If a gap appears:

1. Loosen the 6 back screws of the panel nearest the gap.
2. Shift panel until gap closes.
3. Retighten screws.

Tip 3 Repeat until all panels are flush.

Help

Please review the **Assembly Video** via the QR code to the right. If you still require help assembling the Premier, please reach out to help@glance-led.com.

**Assembly
Video**

